

Pay-Off

www.filecso.com

CANTILEVER TYPE











- Variable model options which are suitable for different reel options
- Variable model options that provide easy reel loading and unloading
- Tailstock options which are suitable for different reel bore diameters
- Easy to integrate to lines
- Pneumatic & Hydraulic & Motorized reel loading and holding systems options
- Guiding roll and pulley groups (Ceramic coated, Steel, Ulpolen) suitable for each product type and requirements
- Custom made design and production possibilities in accordance with customer special requests and expectations

PAY-OFF CANTILEVER TYPE

	Unit/Model	P-CL-1-560/1250	P-CL-1-1000/1600
Drum Dia. Range	∅ mm	560-1250	1000-1600
Drum width	mm	From 395 to 950	From 750 to 1180
Line Speed	m/min	Up to 800	Up to 600
Motor	kW	3,7 - 7,5	7,5 - 11
Compressed air	bar	6-8	6-8
Supply voltage	V	380/50Hz	380/50Hz
Lifting	Hyrolic / motorized	Hyrolic / motorized	Hyrolic / motorized
Pintle on/off	Manuel Pneumatic Hyrolic Motorized	Manuel Pneumatic Hyrolic Motorized	Manuel Pneumatic Hyrolic Motorized

CANTILEVER TYPE

FILECSO

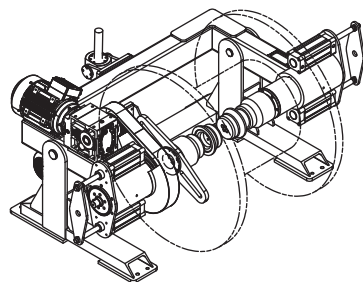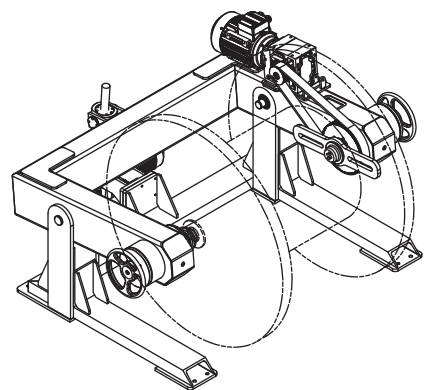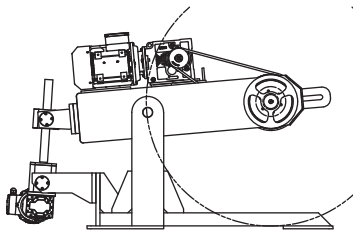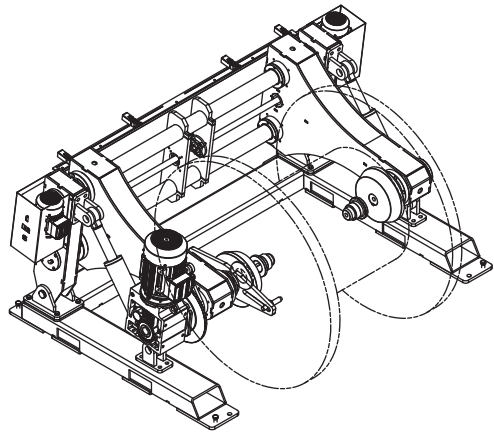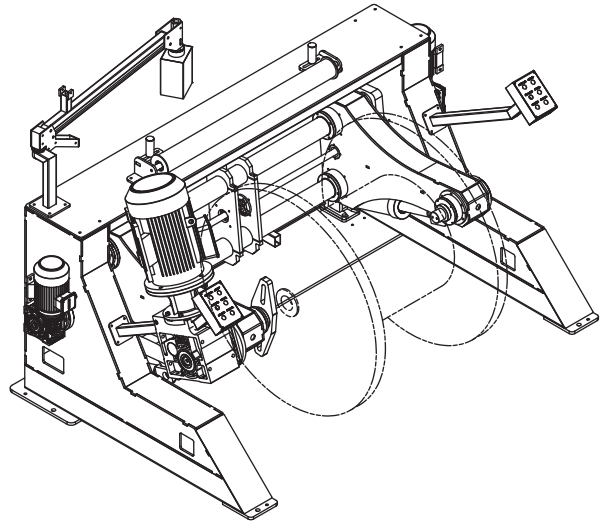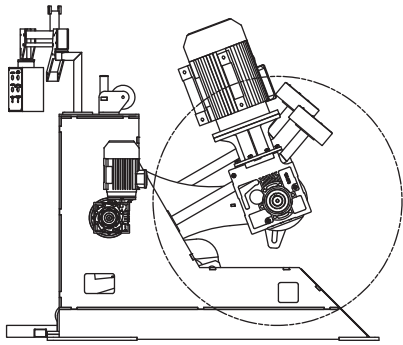





FYLER TYPE



- Non stop bobbin change-over without stopping the line.
- Suitable for high speed extrusion lines.
- Motorized spool loading system
- Easy to integrate to lines
- Wire is pulled out through a free rotating ring, or motorized ring, placed in front of the bobbin flange.
- Custom made design and production possibilities in accordance with customer special requests and expectations

PAY-OFF FYLER TYPE

	Unit/Model	P-DF-560/630	P-DF-630/800
Drum Dia. Range	Ø mm	560 - 630	630 - 800
Drum width	mm	from 395 to 445	from 445 to 600
Cross Section	mm ²	1-4	1,5-6
Wire Ø	mm	0,6-3	1-3,6
Line speed free flange rotation	m/min	350	300
Line Speed Motorized flange	m/min	1000	800
Number of drum	kWv	2	7,5 - 11
Motor -Rotate	kW	0,25	7,5 - 11

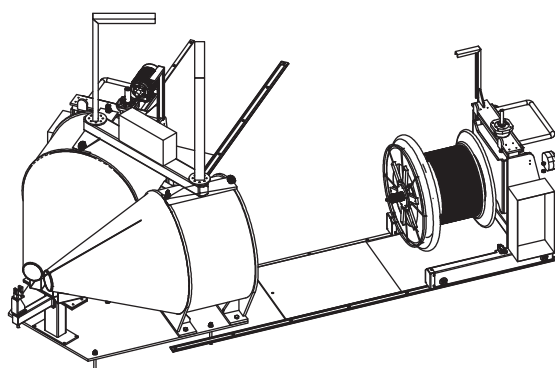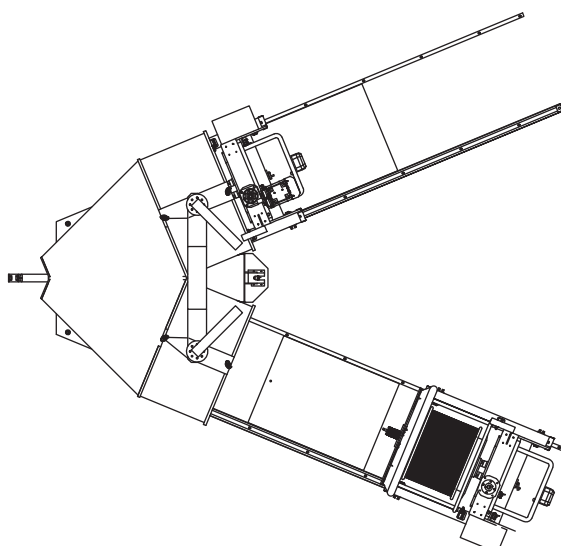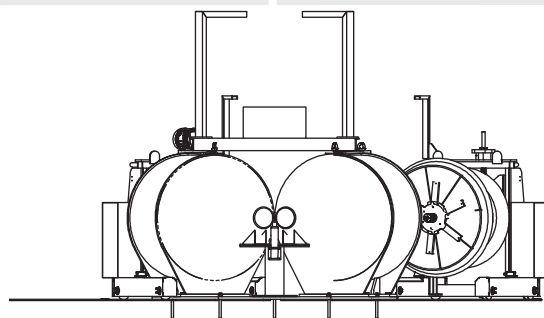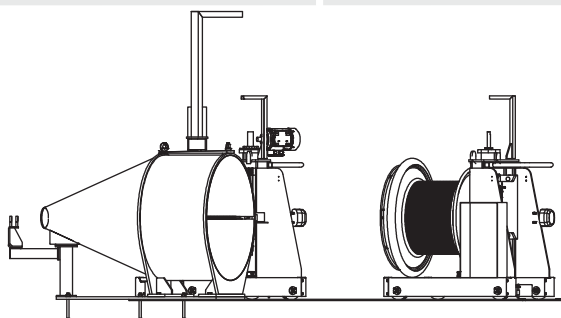


PINTLE TYPE



- Variable model options which are suitable for different reel options
- Variable model options that provide easy spool loading and unloading
- Tailstock options which are suitable for different spool bore diameters
- Easy to integrate to lines
- Guiding roll and pulley groups (Ceramic coated, Steel, Ulpolen) suitable for each product type and requirements
- Custom made design and production possibilities in accordance with customer special requests and expectations

PAY-OFF PINTLE TYPE

	Unit/Model	P-PIN-260/560	P-PIN-260/560
Drum Dia. Range	Ø mm	250-560	250-800
Drum width	mm	from to 395	from 395 to 600
Pintle On-Off		Manuel / Pneumatic	Manuel / Pneumatic
Line Speed	m/min	up to 300	up to 300
Lifting	-	Pneumatic	Pneumatic
Motor	kW	1,5	2,2
Compressed air	bar	6-8	6-8
Supply voltage	V	380/50Hz	380/50Hz

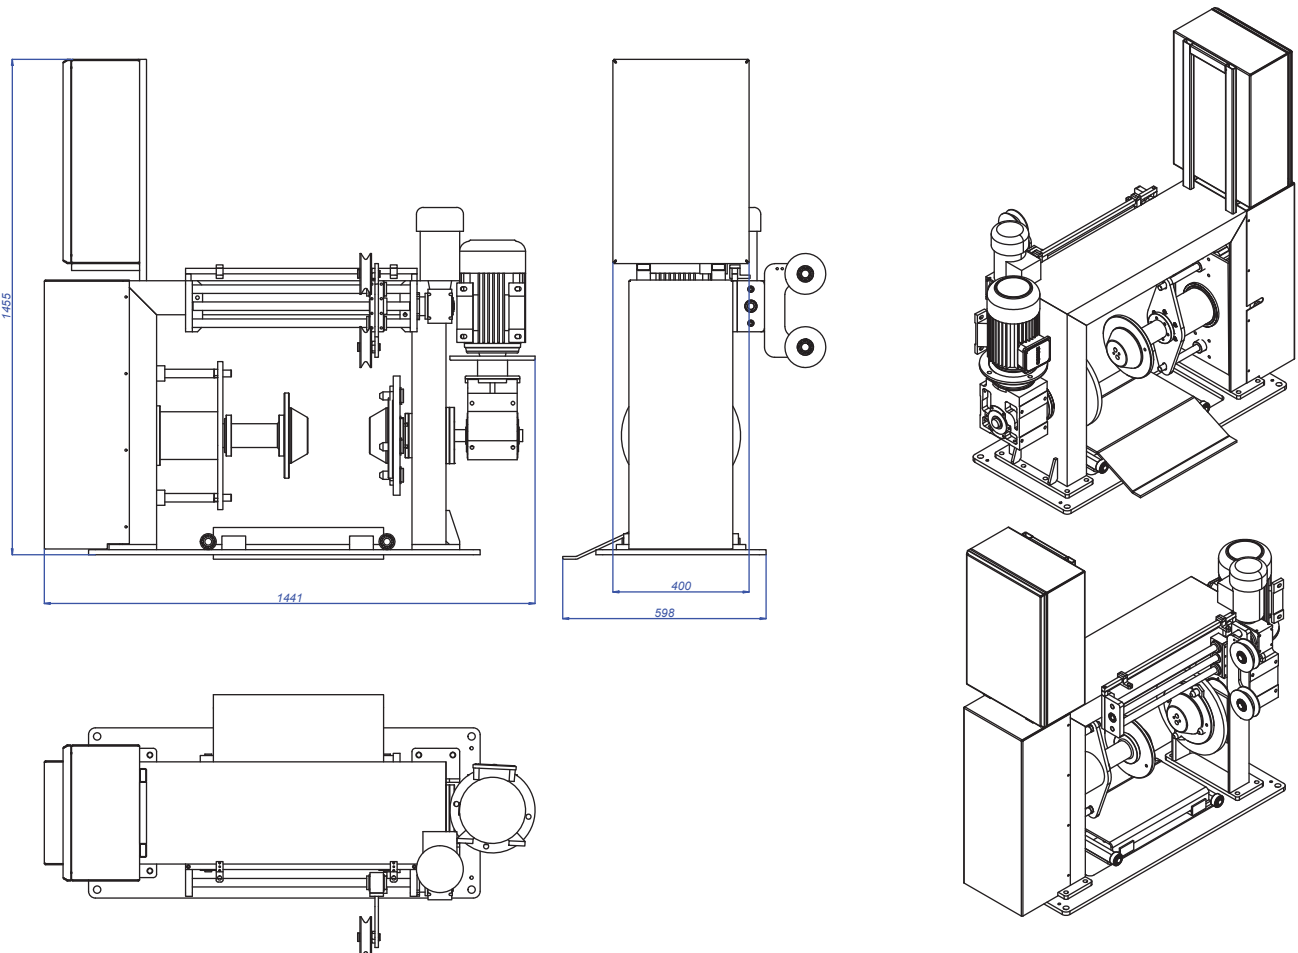





PORTAL TYPE



- Variable model options which are suitable for different reel options
- Motorized loading system that provide easy reel loading and unloading
- Tailstock options which are suitable for different reel bore diameters
- Easy to integrate to lines
- User-friendly control units
- Guiding roll and pulley groups (Ceramic coated, Steel, Ulpolen) suitable for each product type and requirements
- Custom made design and production possibilities in accordance with customer special requests and expectations

PAY-OFF PORTAL TYPE

	Unit/Model	P-POR-1000/2250	P-POR-1250/2800	P-POR-1600/3200
Drum Dia. Range	Ø mm	1000-2250	1250-2800	1600-3200
Drum width	mm	from 750 to 1700	from 950 to 2120	from 1120 to 2000
Max Speed	m/min	180	150	120
Motor Drum	kW	11	15	15
Motor Lifting	kW	1,5	1,5	1,5
Motor Pintle	kW	1,1	1,1	1,1
Drum Loading/Unloading	-	Motorized	Motorized	Motorized

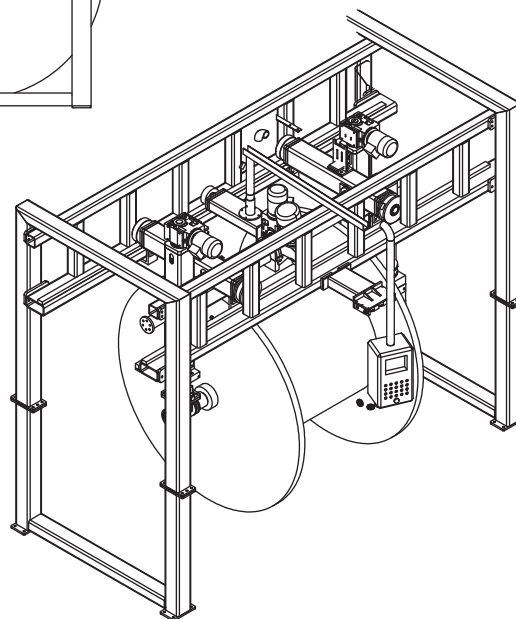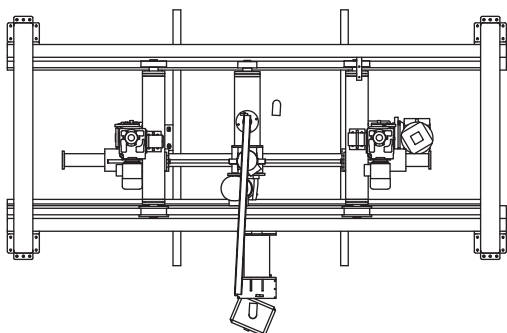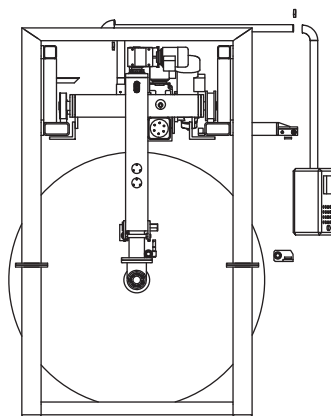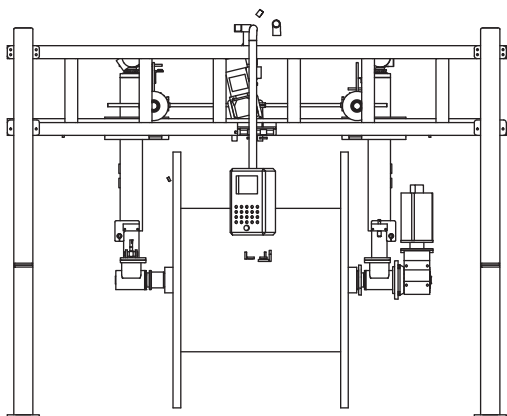





SHAFT TYPE



- Variable model options which are suitable for different reel options
- Tailstock options which are suitable for different reel bore diameters
- Model options available that allow working with single or multiple reels
- Easy to integrate to lines
- Guiding roll and pulley groups (Ceramic coated, Steel, Ulpolen) suitable for each product type and requirements
- Custom made design and production possibilities in accordance with customer special requests and expectations
- Special pallet truck option for easy spool loading and un loading.

PAY-OFF SHAFT TYPE

	Unit/Model	P-SH-560/630	P-SH-630/800
Drum Dia. Range	Ø mm	560 - 630	630 - 800
Drum width	mm	from 395 to 445	from 445 to 600
Line Speed	m/min	300	300
Number of drum	pcs	2-6	2-6
Motor	kW	2,2	2,2
Compressed air	bar	6-8	6-8
Supply voltage	V	380/ 50Hz	380/ 50Hz

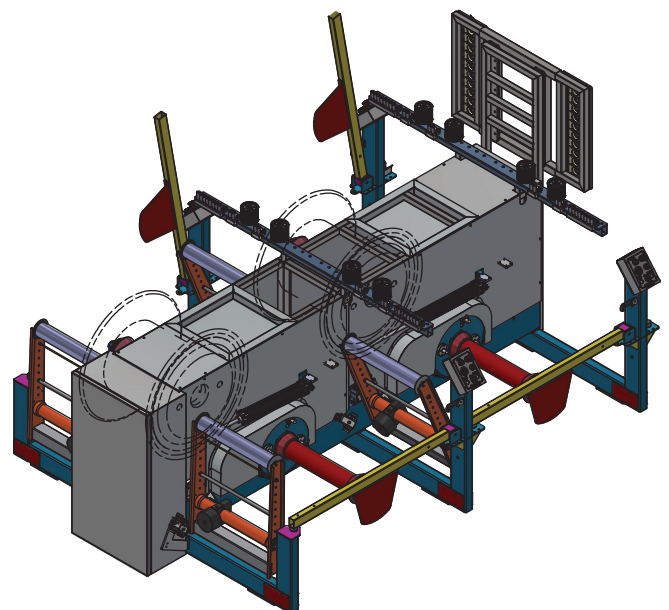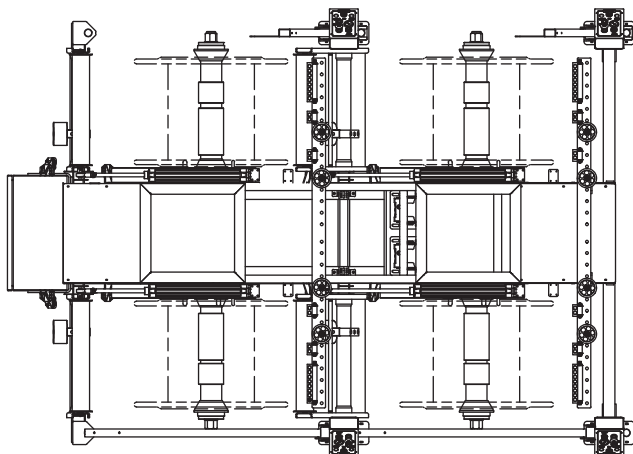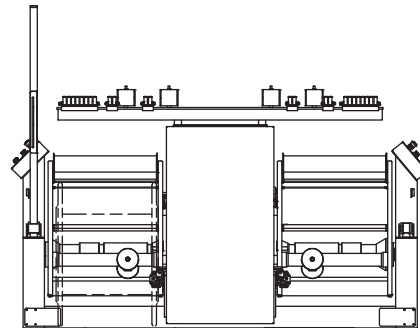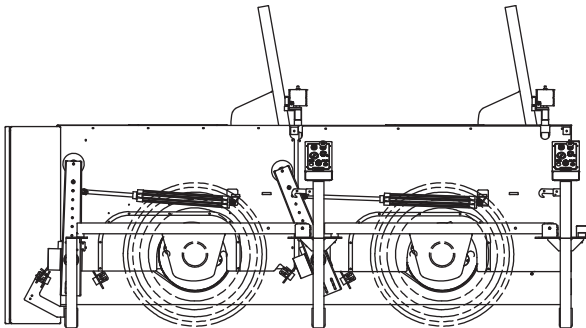





TOWER TYPE



- Variable model options which are suitable for different reel options
- Motorized loading system that provide easy reel loading and unloading
- Tailstock options which are suitable for different reel bore diameters
- Easy to integrate to lines
- User-friendly control units
- Guiding roll and pulley groups (Ceramic coated, Steel, Ulpolen) suitable for each product type and requirements
- Custom made design and production possibilities in accordance with customer special requests and expectations

PAY-OFF TOWER TYPE

	Unit/Model	P-TOW-800/2600
Drum Dia. Range	Ø mm	800 to 2600
Drum width	mm	from 600 to 1900
Line Speed	m/min	up to 300
Main Motor	kW	18,5 - 22
Lifting Motor	kW	2,2
Pintle Motor	kW	1,5
Drum loading/unloading	-	motorized

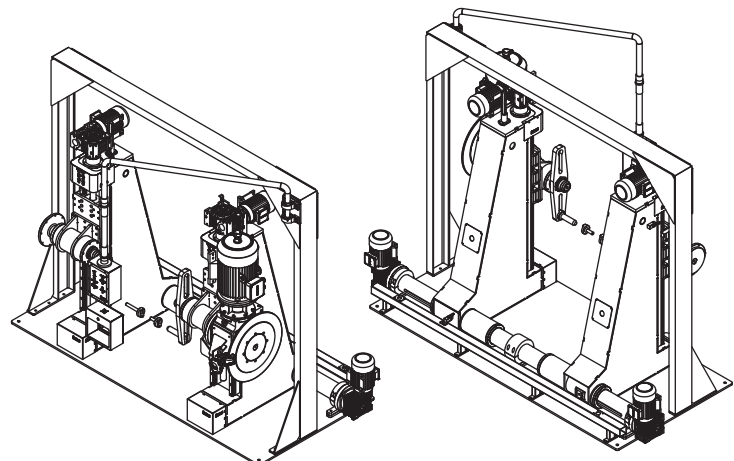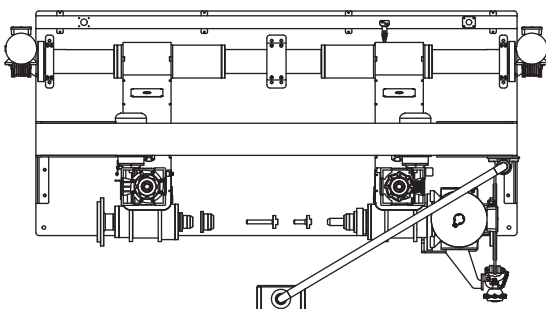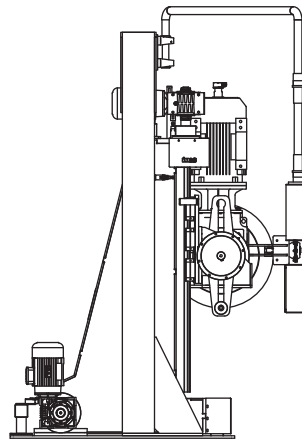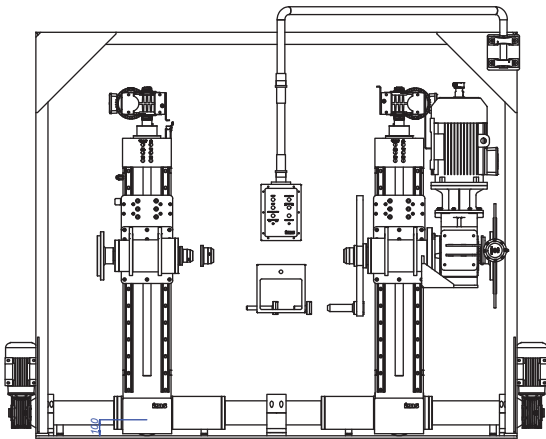






SELF TRAVERS TYPE




- Variable model options which are suitable for different reel options
- Variable model options that provide easy drum loading and unloading
- Tailstock options which are suitable for different drum bore diameters
- Easy to integrate to lines
- Motorized drum loading and holding systems options
- User-friendly control units
- Guiding roll and pulley groups (Ceramic coated, Steel, Ulpolen) suitable for each product type and requirements
- Custom made design and production possibilities in accordance with customer special requests and expectations

PAY-OFF SELF TRAVERSE TYPE

	Unit/Model	P-ST-1000/2250	P-ST-1250/2800	P-ST-1600/3200
Drum Dia. Range	Ø mm	1000-2250	1250-2800	1600-3200
Drum width	mm	from 750 to 1700	from 950 to 2120	from 1120 to 2000
Max Speed	m/min	180	150	120
Motor	kW	11	15	15
Drum Loading	-	motorized	motorized	motorized
Compressed air	bar	6-8	6-8	6-8
Supply voltage	V	380/ 50Hz	380/ 50Hz	380/ 50Hz

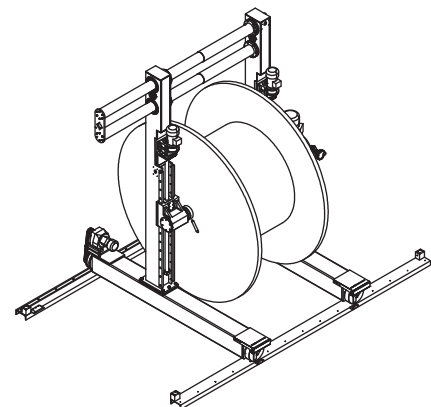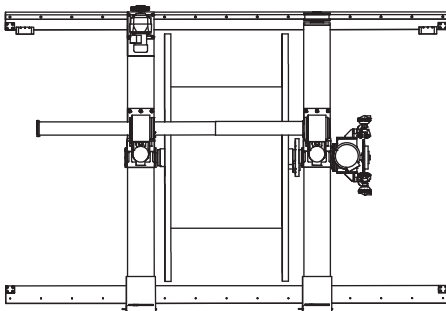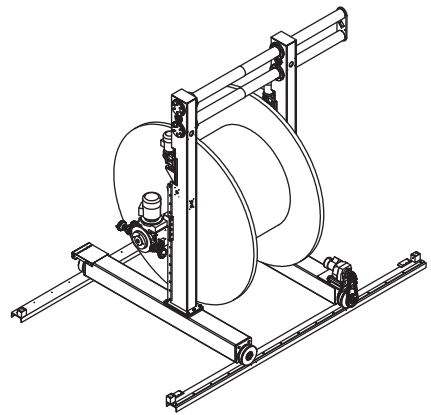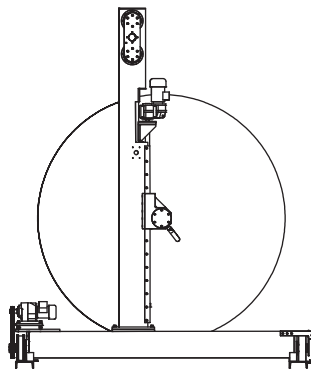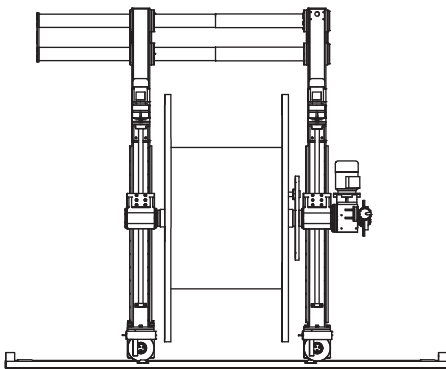

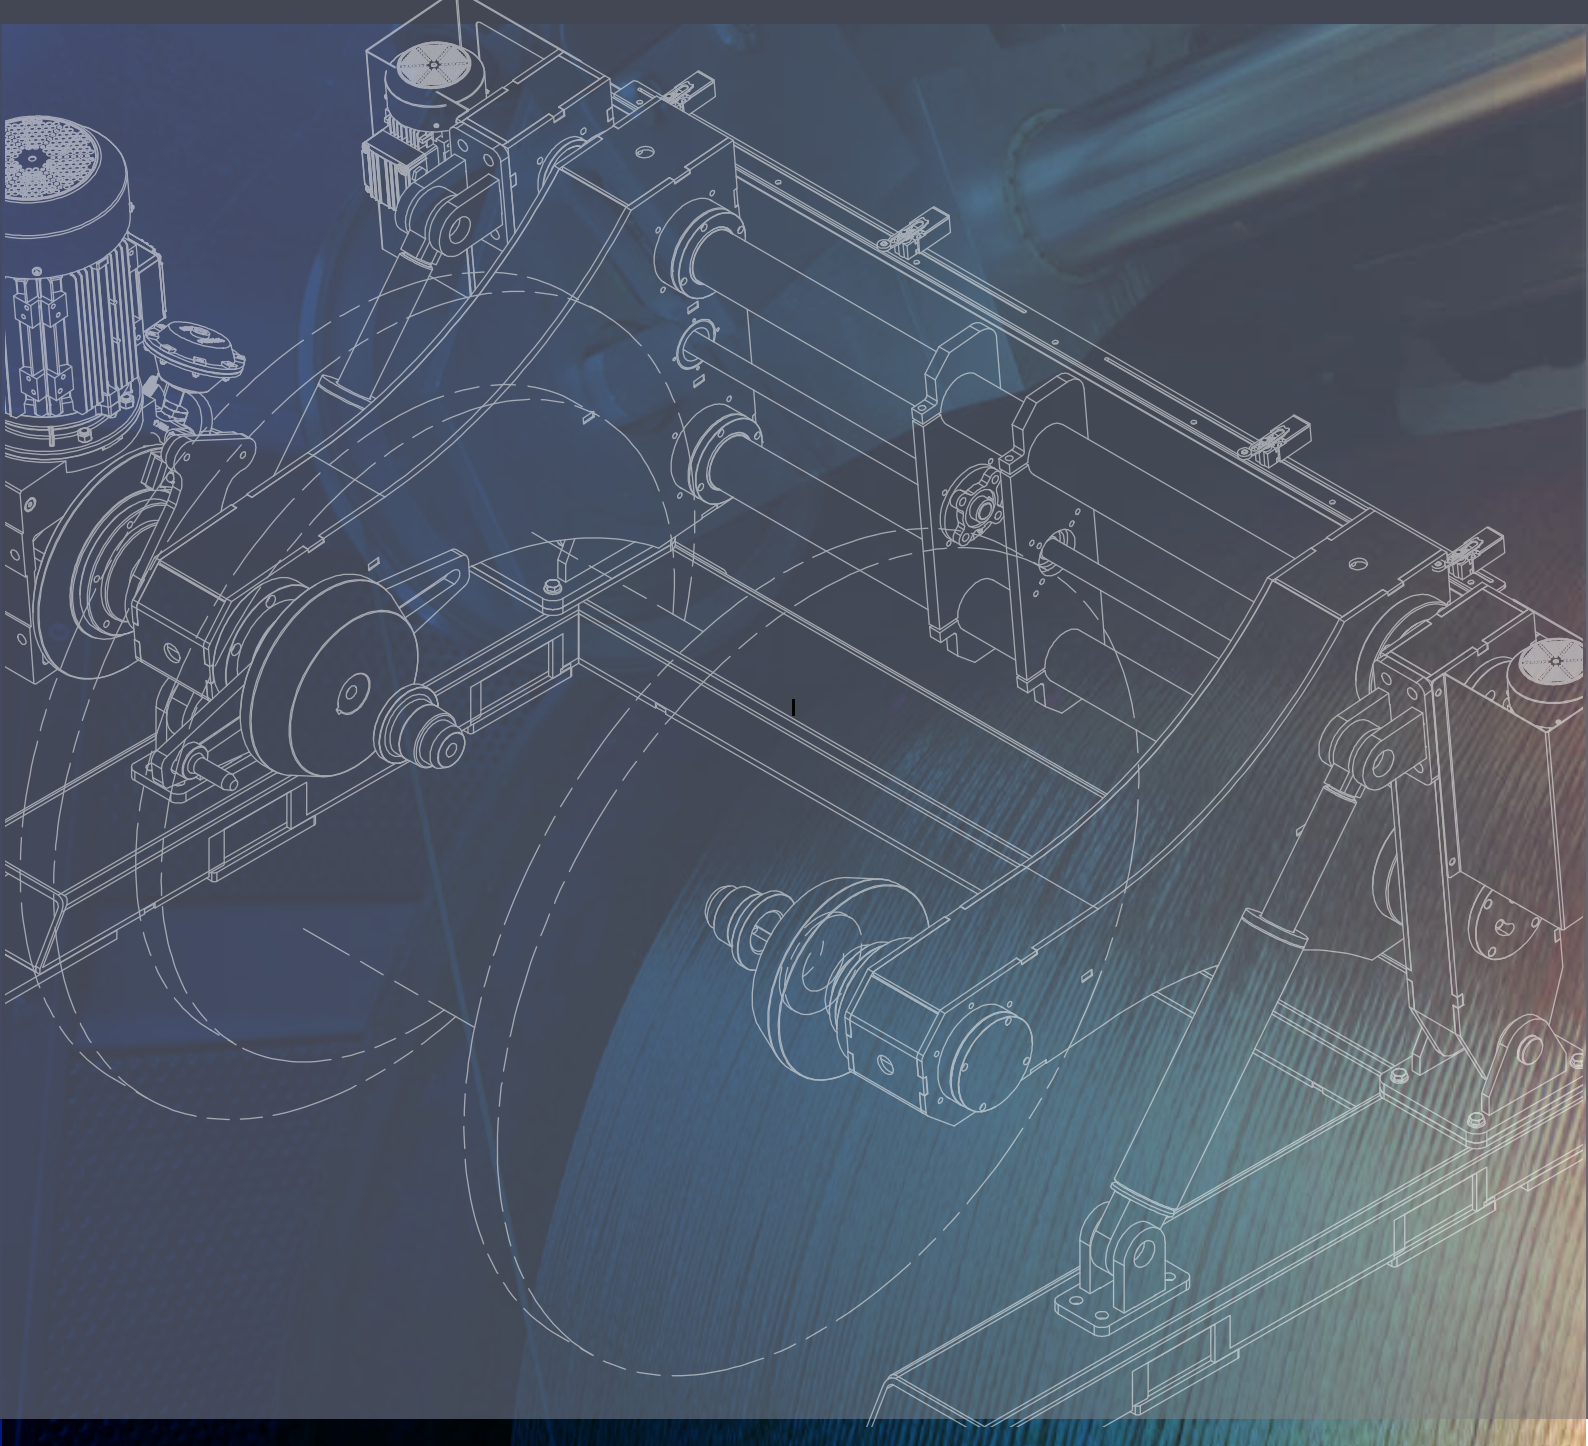

Mehmet Akif Ersoy Mah.
51/2 Sok No:2B
Merkezefendi DENİZLİ -TURKEY
+90 258 502 01 09
info@flecs.com
www.flecs.com